




60

THUNDER
Lightning Rod ESE

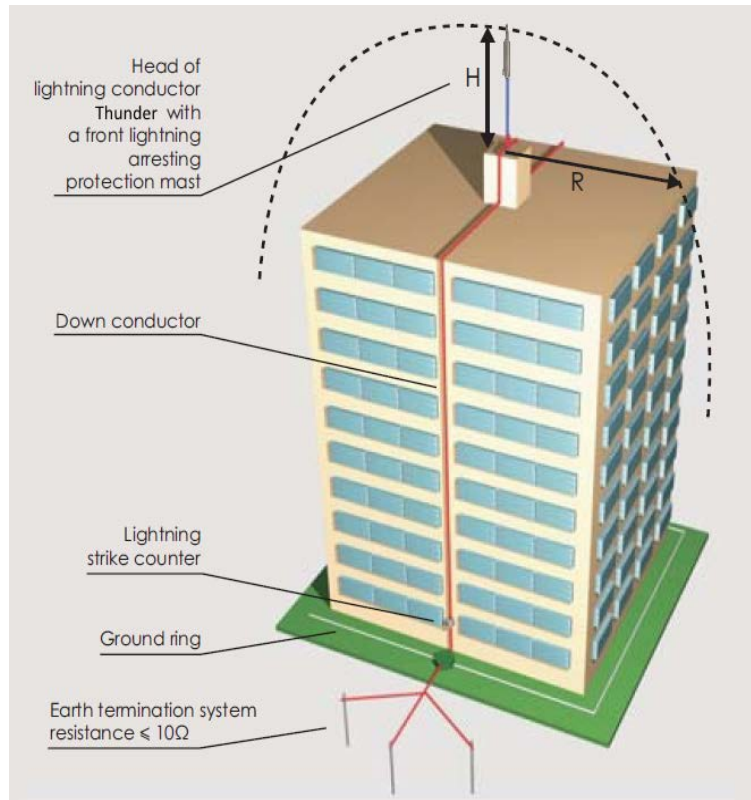

> PROTECTION RADIOS (Rp)

Calculated according to UNE 21186:2011 , NF C 17-102:2011 and NP 4426:2013

ΔT [μS]	Typ	Level Of Protection (efficiency)	H[m]						
			2	4	6	8	10	20	60
60	Thunder 60	(98%)I	31	63	79	79	79	80	80
		(95%)II	35	69	87	87	88	89	90
		(%90)III	39	78	97	98	99	102	105
		(80%)IV	43	85	107	108	109	113	120

h (m) : Height of the air terminal over the element to be protected (in meters).
D (m) : Rolling sphere radius (in meters) .